

Fig. 1

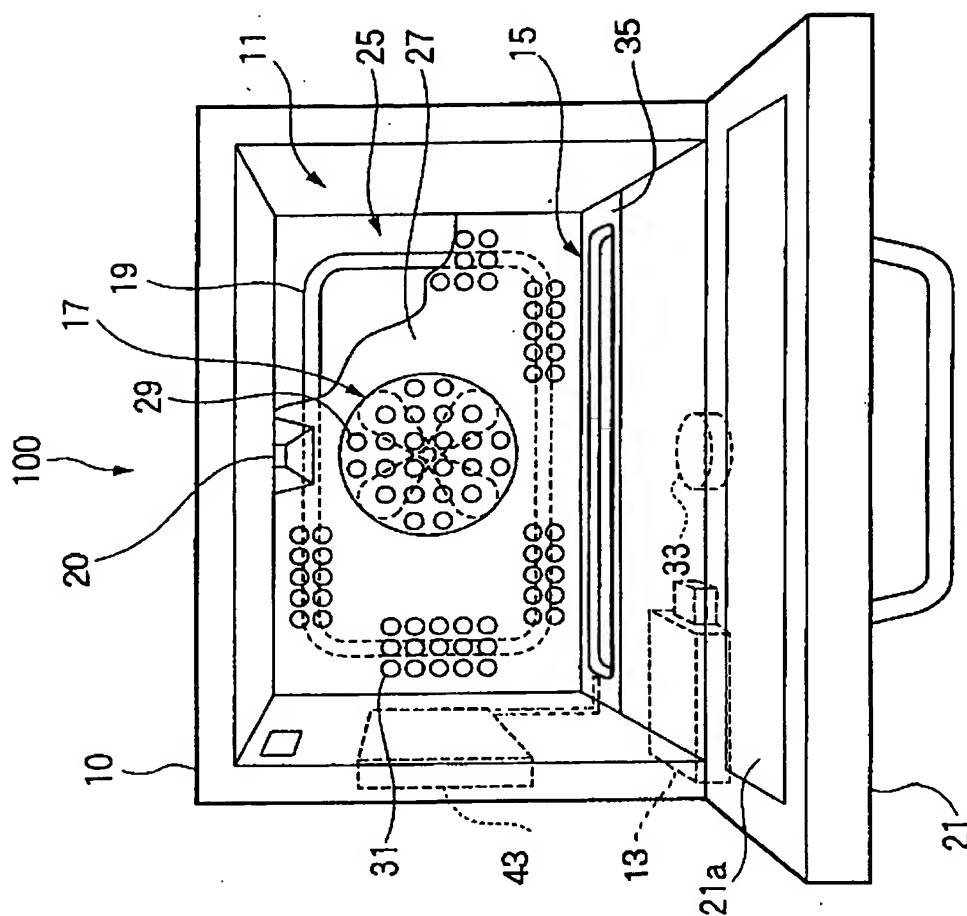


Fig. 2

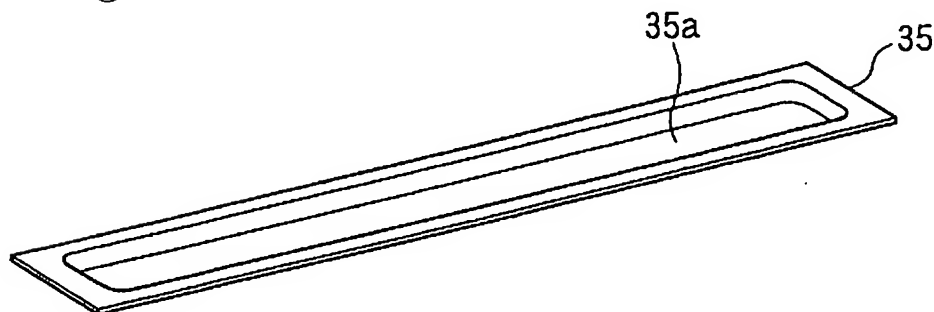


Fig. 3

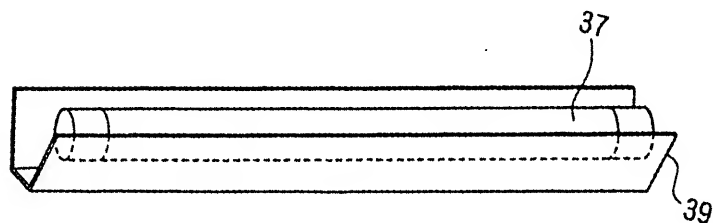


Fig. 4

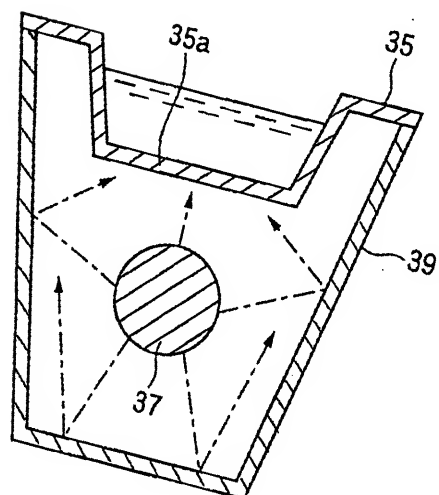


Fig. 5

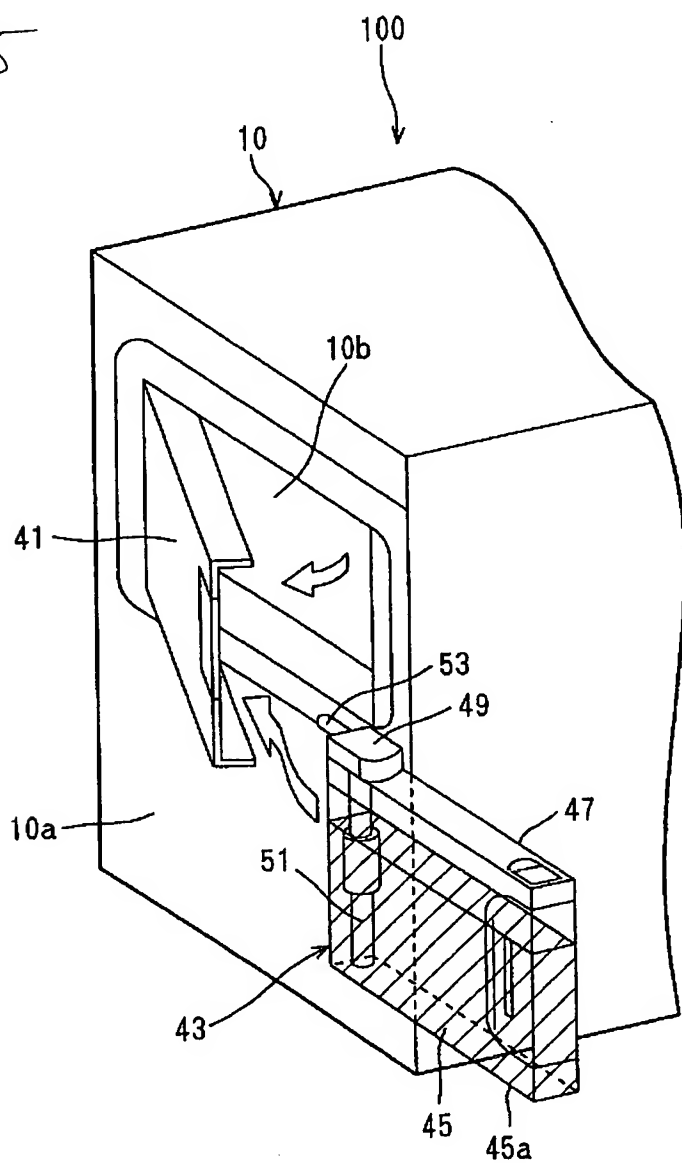


Fig. 6

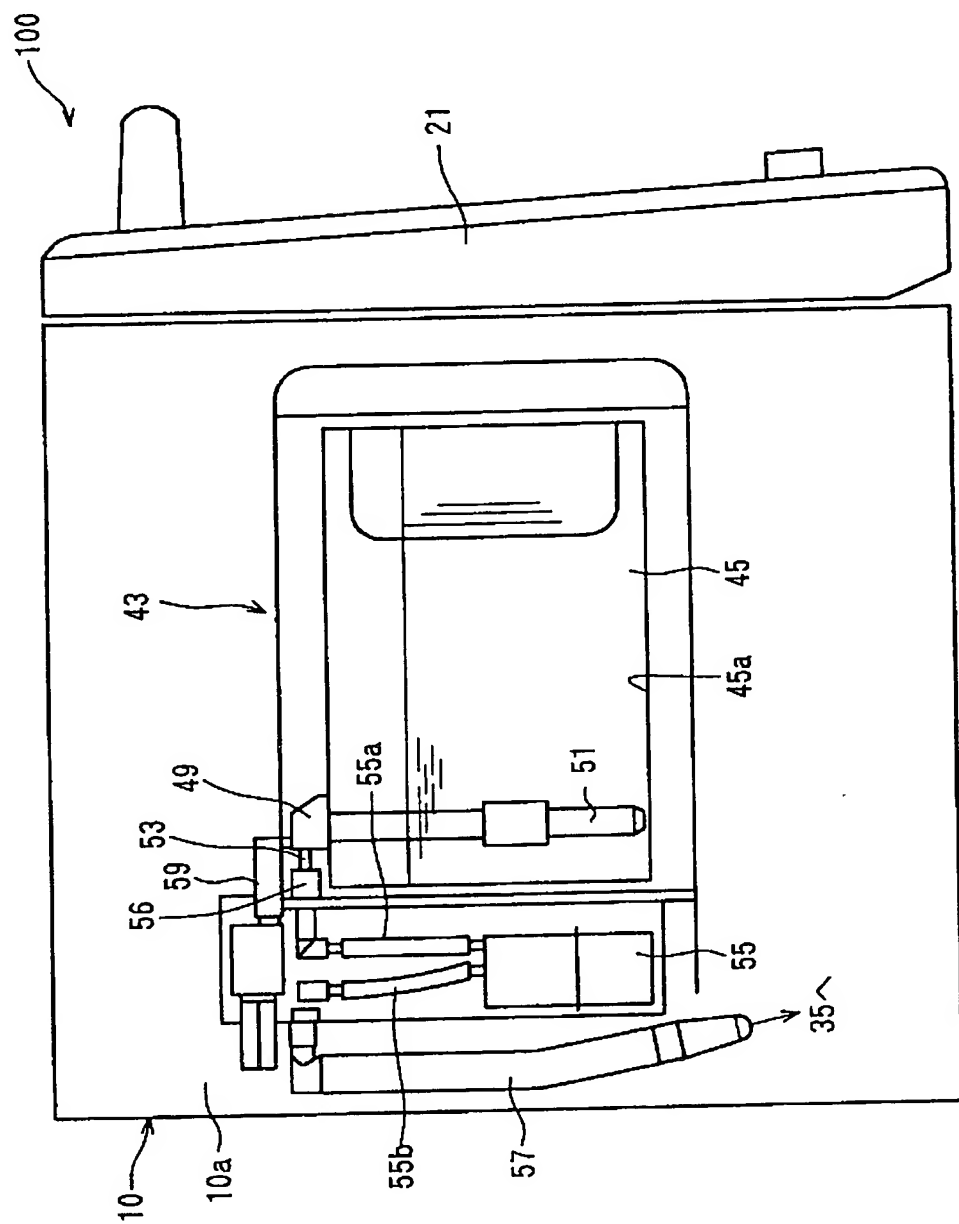


Fig. 7

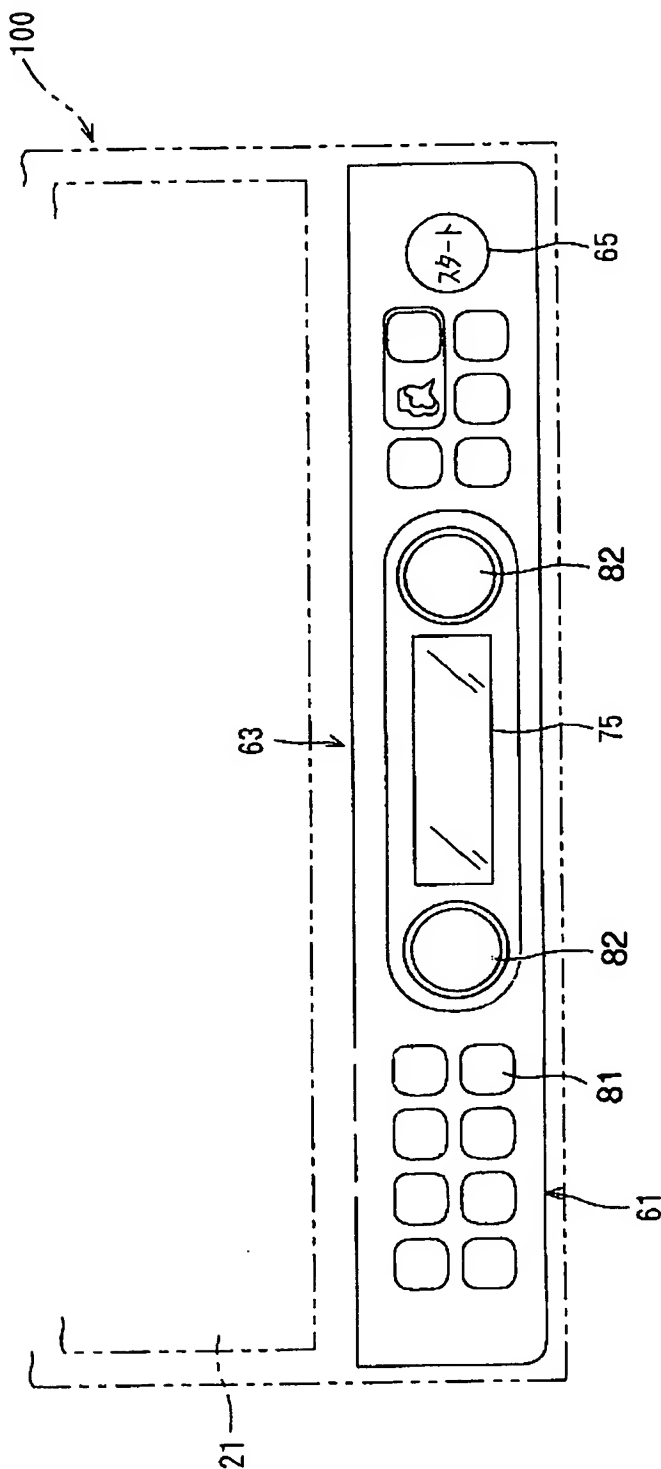


Fig. 8


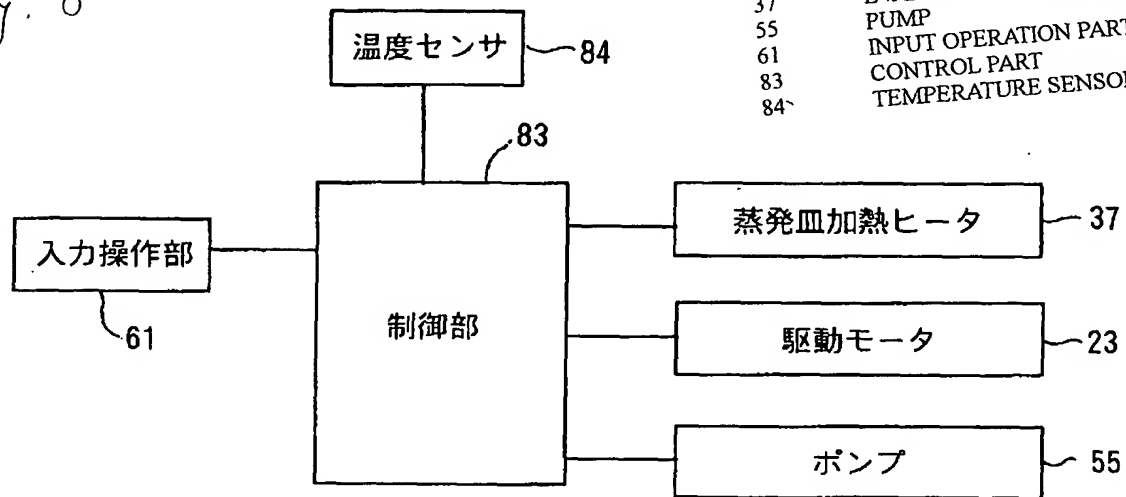


FIG. 8  
23 DRIVE MOTOR  
37 EVAPORATING DISH HEATER  
55 PUMP  
61 INPUT OPERATION PART  
83 CONTROL PART  
84 TEMPERATURE SENSOR

Fig. 9

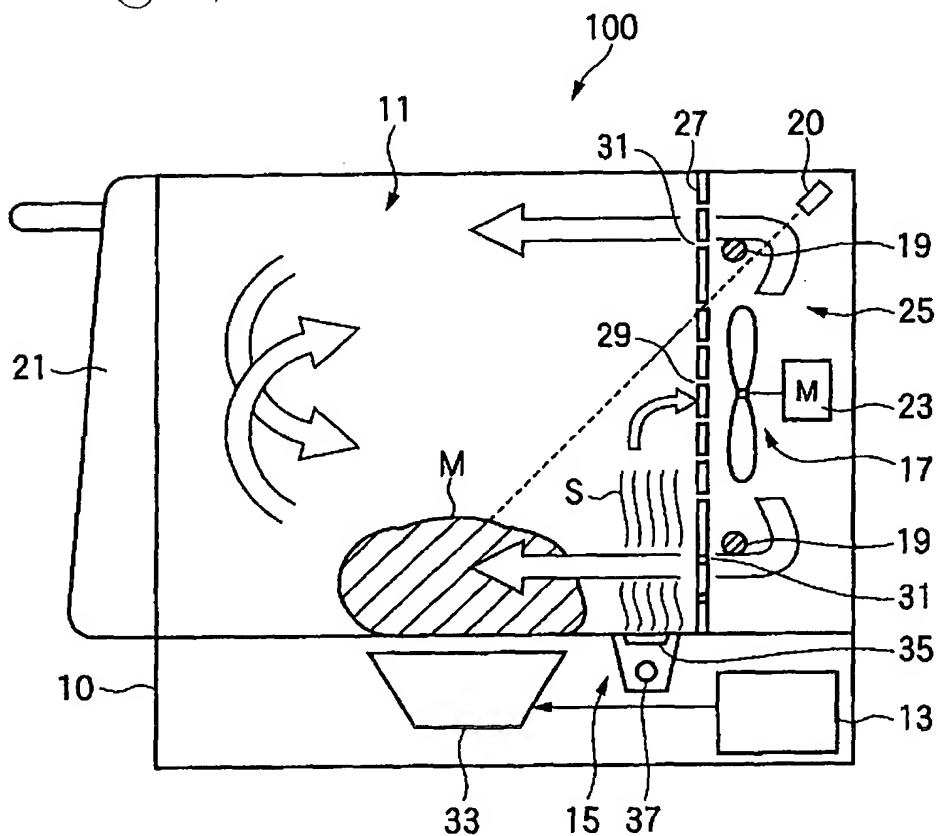

【図10】

Fig. 10


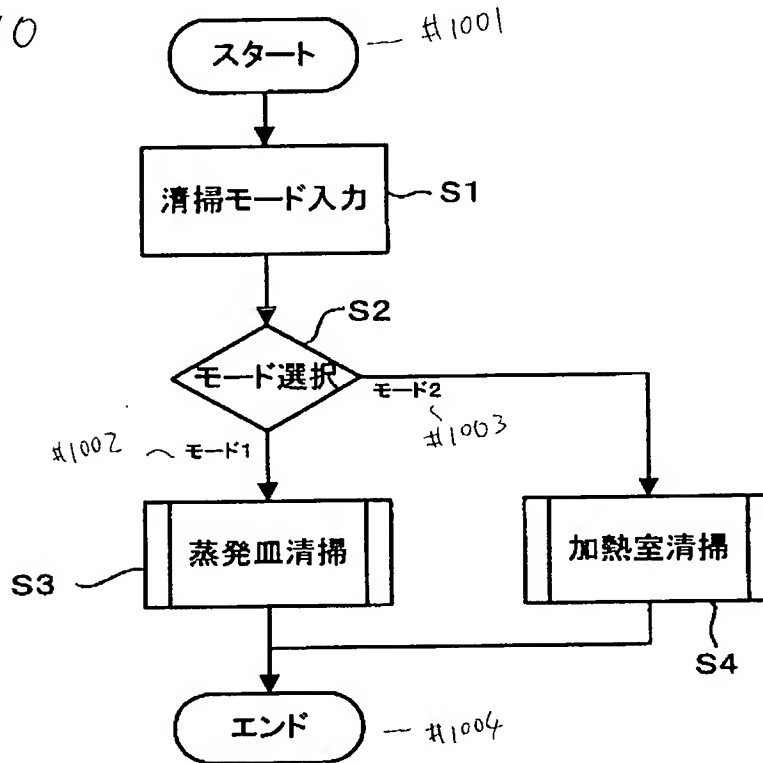


FIG. 10  
 #1001 START  
 S1 INPUT CLEANING MODE  
 S2 SELECT MODE  
 #1002 MODE 1  
 #1003 MODE 2  
 S3 CLEAN EVAPORATING DISH  
 S4 CLEAN HEATING CHAMBER  
 #1004 END

【図11】

Fig. 11

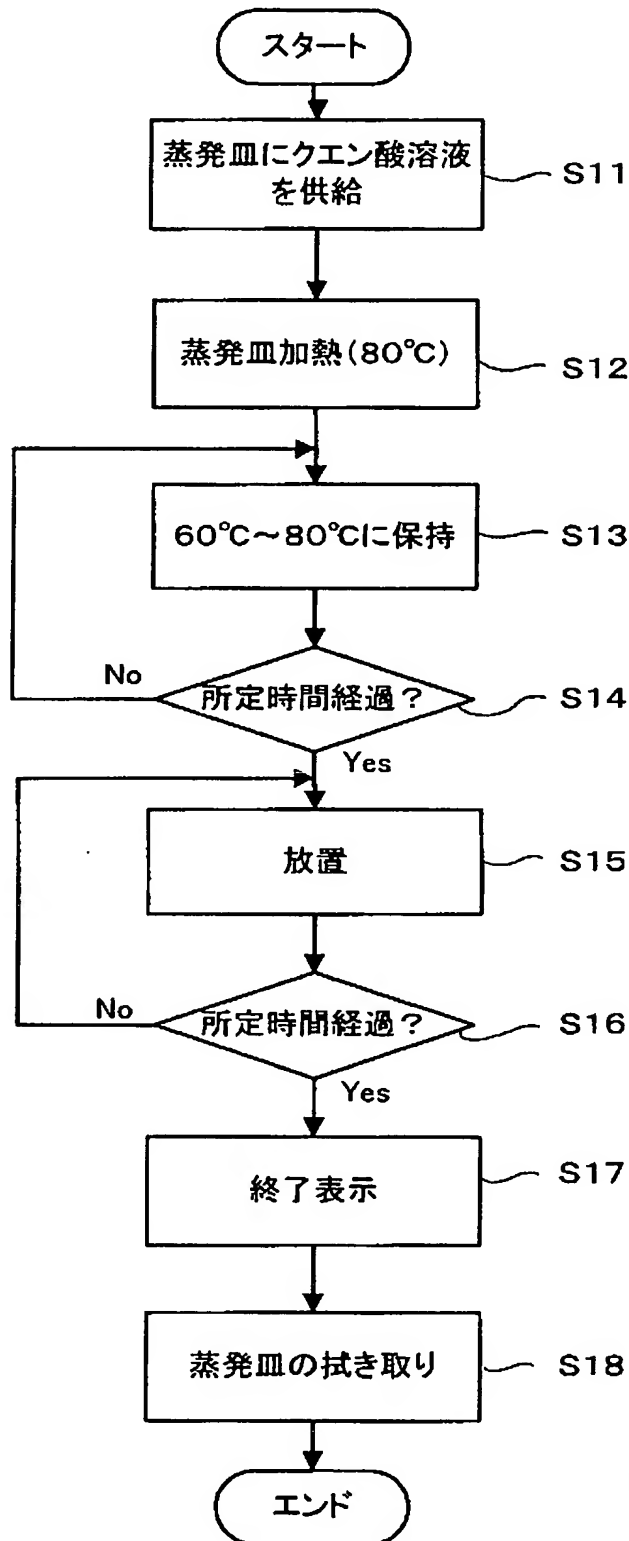

【図12】

FIG. 11  
#1101  
S11  
S12  
S13  
S14  
S15  
S16  
S17  
S18  
#1102

START  
SUPPLY CITRIC ACID SOLUTION INTO  
EVAPORATING DISH  
HEAT EVAPORATING DISH (80℃)  
KEEP TEMPERATURE OF 60 TO 80℃  
DOES PREDETERMINED TIME ELAPSE?  
LEAVE CLEANING LIQUID STANDING  
DOES PREDETERMINED TIME ELAPSE?  
DISPLAY COMPLETION  
WIPE EVAPORATING DISH  
END



Fig. 12

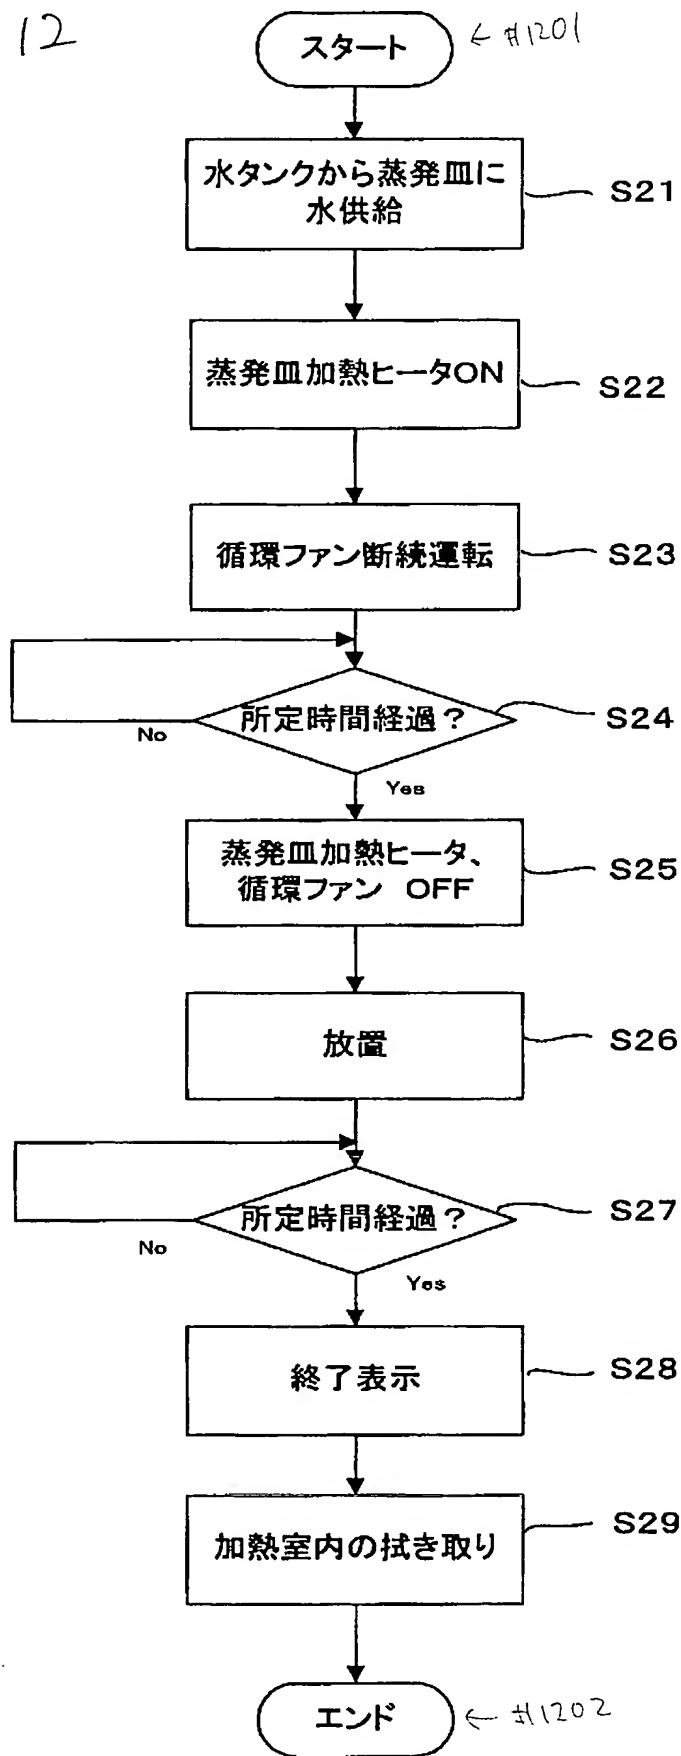


FIG. 12

#1201

S21

S22

S23

S24

S25

S26

S27

S28

S29

#1202

START

SUPPLY WATER INTO EVAPORATING DISH  
FROM WATER TANK

TURN ON EVAPORATING DISH HEATER

DRIVE CIRCULATION FAN INTERMITTENTLY

DOES PREDETERMINED TIME ELAPSE?

TURN OFF EVAPORATING DISH HEATER AND  
CIRCULATION FAN

LEAVE IT STANDING

DOES A PREDETERMINED TIME ELAPSE?

DISPLAY COMPLETION

WIPE HEATING CHAMBER

END